

Features


- Heavy salt damage resistance
- Corrosion resistant stainless steel frame
- For 24V system
- Polycrystalline silicon
- Maximum power point 12W
- Easy installation
- As a power source for DC24V devices on the ships or trucks




Specification

MODEL	DBG012-24
Maximum Power Point (Pmax)	12.0W
Maximum Power Point Voltage (Vmpp)	37.58Vdc
Maximum Power Point Current (Impp)	0.32A
Open Circuit Voltage (Voc)	44.64Vdc
Short Circuit Current (Isc)	0.34A
Dimensions (D×W×H)	354×417×23mm
Weight	2kg

I-V Curve

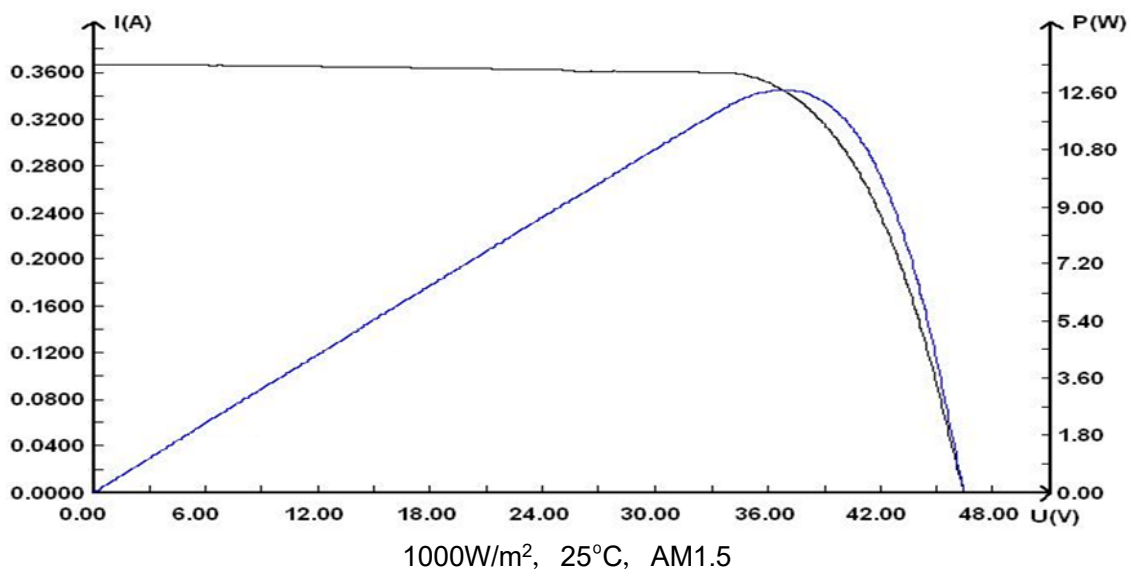

■ Dimensions

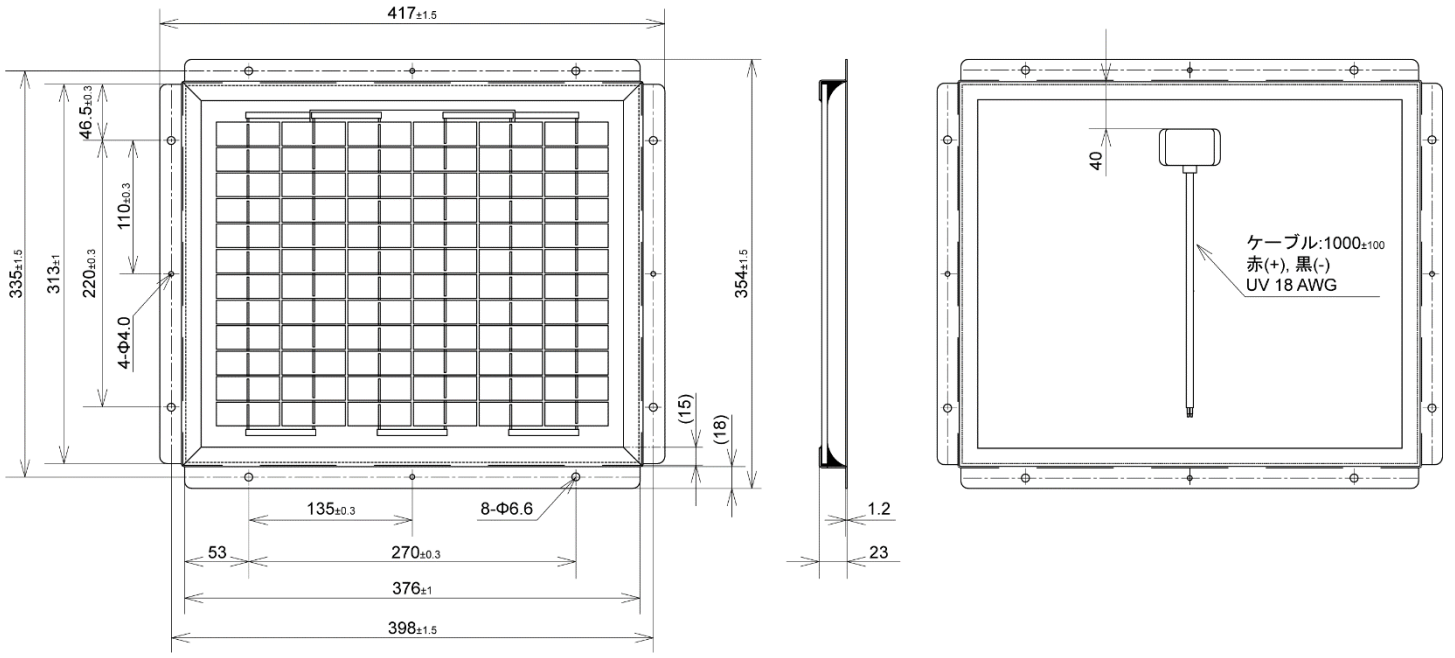

Unit [mm]